

EB 1T2.VX.XXXX - <https://bafang-e.com/en/oem-area/components/component/connector/eb-1t2vxxxx/>

SPECIFICATIONS

Core Data

Suitability **EB-BUS**
Operating temperature **-20 - 45°C**


Mounting Parameters

Connector Size(mm) **26*9*9(L*W*H)**

Tests & Certifications

IP-Code **IP X5**
Cetifications **ROHS**

PINS

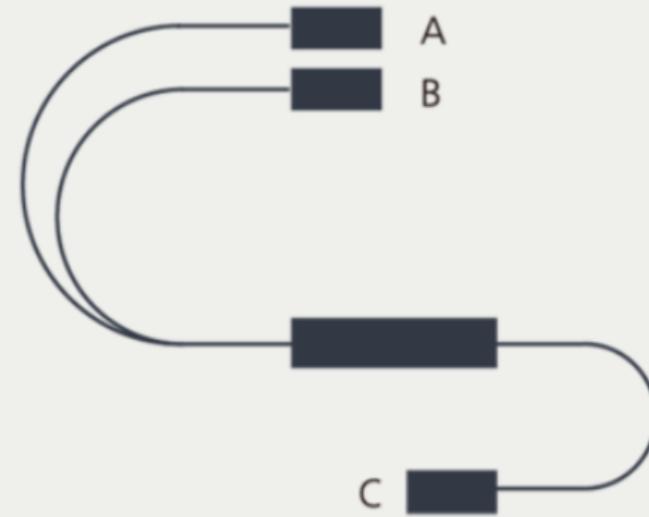

Pin A Female Yellow 3 Pins Left Brake (M3.10)

Pin B Female Yellow 3 Pins Right Brake (M3.10)

Pin C Female 6 Pins (M6.5.3)



EB 1T3.JX.XXXX - <https://bafang-e.com/en/oem-area/components/component/connector/eb-1t3jxxxx/>

SPECIFICATIONS

Core Data

Suitability **EB-BUS**
Operating Temperature **-20 - 45°C**


Mounting Parameters

Connector Size(mm) **28*9*9(L*W*H)**

Tests & Certifications

IP-Code **IP X5**
Cetifications **ROHS**

PINS

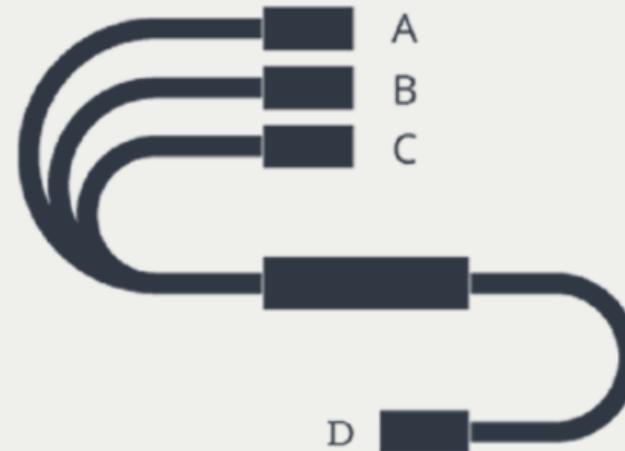

Pin A Female Blue 4 Pins Speed Sensor (M4.3)

Pin B Male Purple 6 Pins Gear Sensor (G6.5)

Pin C Female 2 Pins (7015-BS-2)

Pin D Male 8 Pins (G8.5.3)



SPECIFICATIONS

Core Data

Suitability	EB-BUS
Operating Temperature	-20 - 45°C


Mounting Parameters

Connector Size(mm)	26*9*9(L*W*H)
--------------------	----------------------

Tests & Certifications

IP-Code	IP X5
Certifications	ROHS

PINS

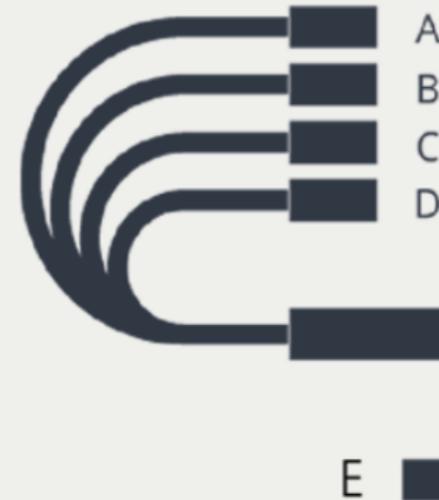

Pin A	Female Yellow 3 Pins BMS (M3.12)
Pin B	Female Green 5 Pins Display (M5.4)
Pin C	Female 2 Pins (7015-BS-2)
Pin D	Male Yellow 3 Pins Throttle (G3.10)
Pin E	Female 8 Pins (M8.5.3)

All Bafang connector cables

<https://bafang-e.com/en/oem-area/components/connector/>