


Once removed the protective cap, locate the connector in the foreground among the

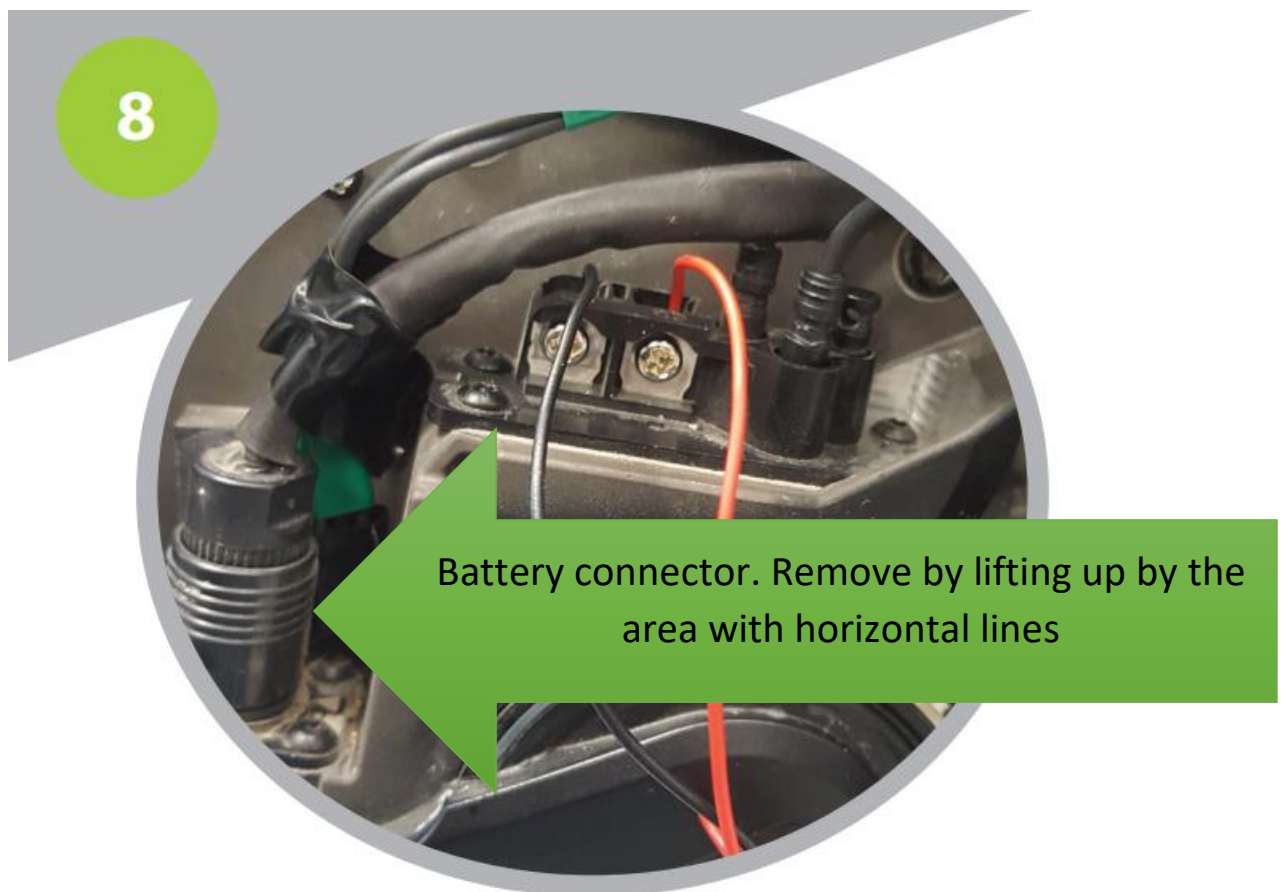

lack cable between the screw with the symbol - and the plate (left),